

R 12B

Feeders for mailing,
printing and packaging

R-12 BATCH COUNTING FEEDER

Our R-12B and R-20B batch counting feeders are the ideal solution for your material counting needs!

Featuring our patented Buckle Separation technology, patented Repositionable Feed Belts and coupled with our complete paper guide system, the R-12B and R-20B feeders can easily handle your hard to feed pieces. Operating at speeds up to 40,000 pieces per hour, these robust machines are the ideal solution for feeding multiple documents into inserters, collators, shrink wrap equipment and a host of other packaging machinery.

Straight Shooter's unique adjustable angle acceleration table allows you to deliver documents to your production machinery at the optimum angle, no matter what the application! This enhances productivity while minimizing waste.

Featuring an easy to use color touch screen, the R-12B and R-20B can be used in batch count, single shot, or even continuous mode for high speed mailing and printing lines!



R-12B AND R-20B FEEDERS ARE GREAT FOR FEEDING INTO:

- * **COLLATORS**
- * **SHRINK WRAP EQUIPMENT**
- * **PLOW FOLDERS**
- * **INK JET EQUIPMENT**
- * **TABBING MACHINES**
- * **BINDERY EQUIPMENT**


STRAIGHT SHOOTER EQUIPMENT COMPANY \ 580 AXMINISTER DRIVE, FENTON, MO 63026
PHONE (607) 334-6811 FAX (607) 336-2181 TOLL FREE (800) 785-4177 WWW.FEEDSTRAIGHT.COM

VERSATILITY... AT A GREAT PRICE!

Simple angle adjustment on the acceleration table allows you to customize the R-12B and R-20B for any application.

Set the table flat for ink jetting or tabbing and downward for collators and bindery equipment.

The R-12B and R-20B come standard with our state-of-the-art color touch screen. Simple, intuitive screens offer quick setup and include total piece AND total batch counters. A manual run setting is also included for continuous run applications and easy machine setup.

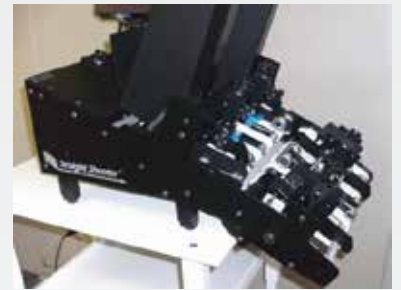

The R-12/20B feeders include a separate start photo sensor that can be mounted on your packaging line to trigger the feeder at exactly the right time.

Three different feed start methods are standard:

- * External Start Trigger (photo sensor)
- * Touch screen push button start
- * Automatic timed restart (operator adjustable)

A miss output is standard and can be used to stop your packaging line if the feeder runs out of material!



SPECIFICATIONS

Media Handling:

Width: 3" minimum up to 12" maximum
(20" on R-20B)

Length: 2" minimum up to 17" maximum

Thickness: Single sheet up to 3/8" thick

Speeds: Up to 40,000 postcards per hour

Power:

120 vac, 5 amp standard, (240 optional)

Available interlocks: Dry contact, 12 vdc,
24 vdc, 24 vac. Others upon request.

Dimensions: 17" wide x 26" long (B-12)

Weight: 65 lbs - boxed

STRAIGHT SHOOTER EQUIPMENT COMPANY \ 580 AXMINISTER DRIVE, FENTON, MO 63026
PHONE (607) 334-6811 FAX (607) 336-2181 TOLL FREE (800) 785-4177 WWW.FEEDSTRAIGHT.COM